

Emissions Control System

GENERAL

CRANKCASE EMISSION CONTROL SYSTEM

POSITIVE CRANKCASE VENTILATION (PCV) VALVE

EVAPORATIVE EMISSION CONTROL SYSTEM

CANISTER
PURGE CONTROL SOLENOID VALVE (PCSV)
FUEL FILLER CAP

EXHAUST EMISSION CONTROL SYSTEM

CONTINUOUS VARIABLE VALVE TIMING (CVVT)

GENERAL

DESCRIPTION EF820ADF

Components	Function	Remarks
Crankcase Emission System - Positive Crankcase Ventilation (PCV) valve	HC reduction	Variable flow rate type
Evaporative Emission System - Evaporative emission canister - Purge Control Solenoid Valve (PCSV)	HC reduction HC reduction	Duty control solenoid valve
Exhaust Emission System - MFI system (air-fuel mixture control device) - Three-way catalytic converter	CO, HC, NOx reduction CO, HC, NOx reduction	Heated oxygen sensor feedback type Monolithic type

SPECIFICATIONS EEC2CAF3

PURGE CONTROL SOLENOID VALVE (PCSV)

▷ Specification

Item	Specification
Coil Resistance (Ω)	19.0 ~ 22.0 Ω [20°C (68°F)]


TIGHTENING TORQUES EBB8C54B

Item	N·m	kgf·m	lbf·m
Positive Crankcase Ventilation Valve	8.0 ~ 12.0	0.8 ~ 1.2	6.0 ~ 8.0

TROUBLESHOOTING EBE39332






Symptom	Suspect area	Remedy
Engine will not start or hard to start	Vacuum hose disconnected or damaged	Repair or replace
	Malfunction of the Purge Control Solenoid Valve	Repair or replace
Rough idle or engine stalls	Vacuum hose disconnected or damaged	Repair or replace
	Malfunction of the PCV valve	Replace
	Malfunction of the evaporative emission canister purge system	Check the system; if there is a problem, check related components parts
Excessive oil consumption	Positive crankcase ventilation line clogged	Check positive crankcase ventilation system

COMPONENT LOCATION EED33106

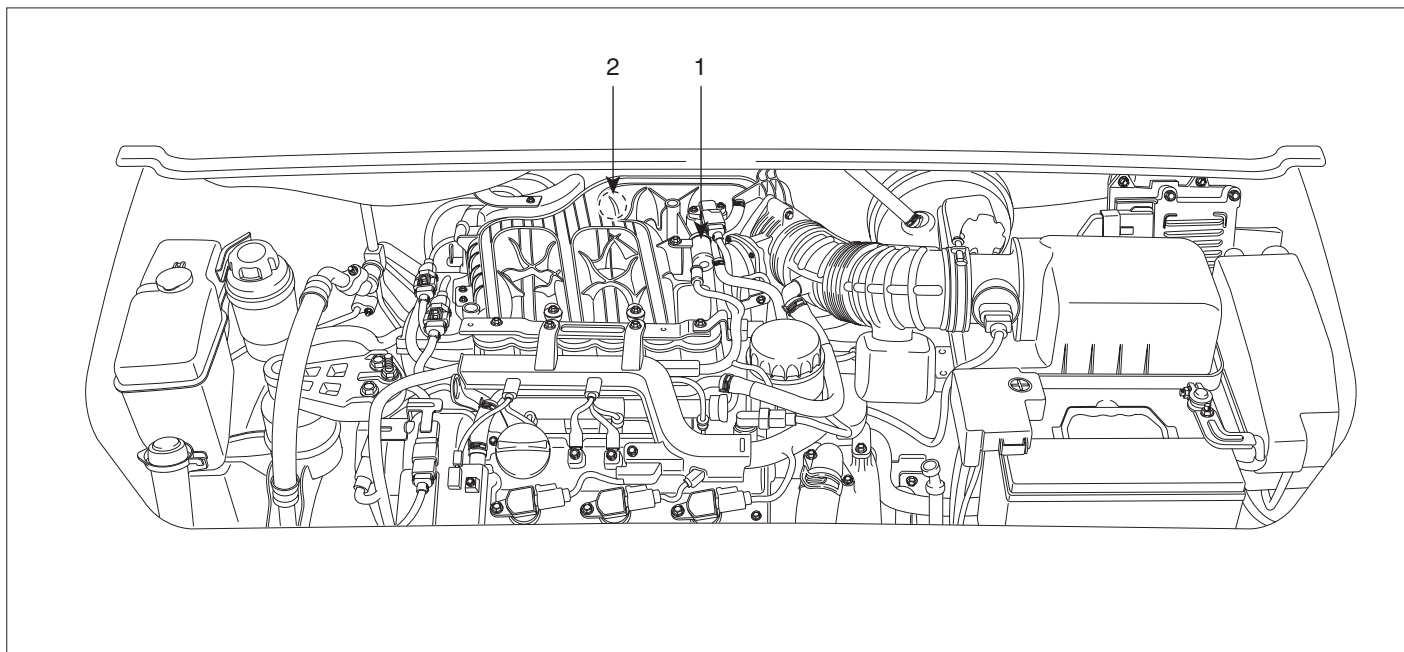


1. Purge Control Solenoid Vavle (PCSV)
2. PCV Valve
3. Canister
4. Catalytic Converter (Bank1)
5. Catalytic Converter (Bank2)

LEKG011A

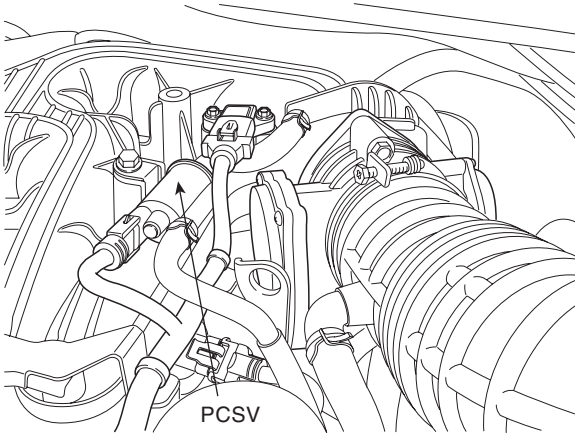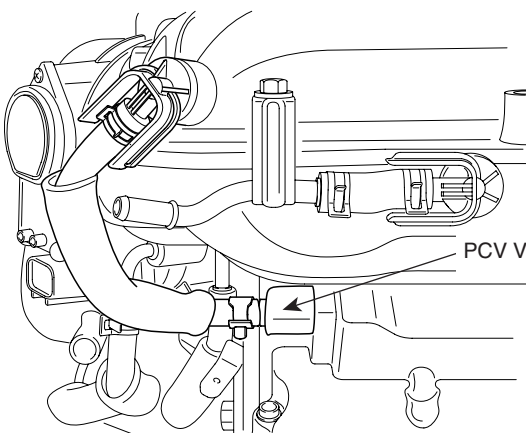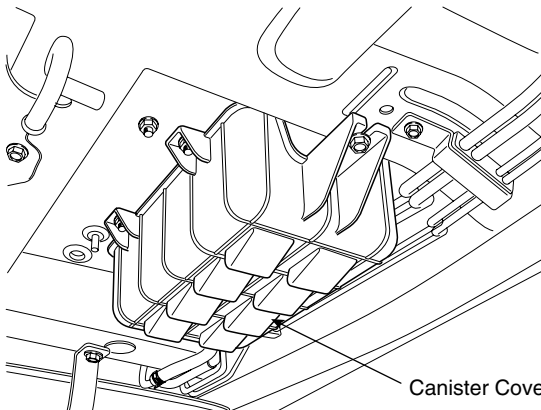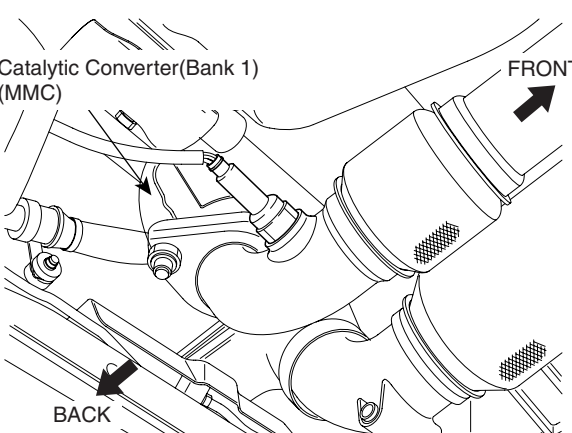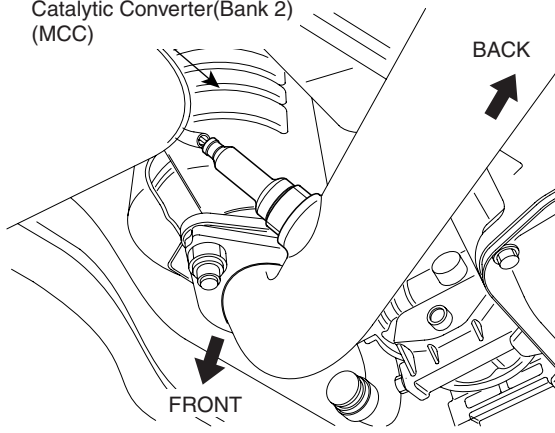1	Purge Control Solenoid Valve (PCSV)	2	Positive Crankcase Ventilation (PCV) Valve
 PCSV BEKG001B		 PCV Valve BEKG001C	
3	Canister	4	Catalytic Converter (Bank 1)
 Canister Cover * Canister is inside the cover LEKG001A		 Catalytic Converter(Bank 1) (MMC) FRONT BACK BEKG001P	
5	Catalytic Converter (Bank 2)		
 Catalytic Converter(Bank 2) (MCC) FRONT BACK BEKG001Q			

SCHEMATIC DIAGRAM


E42C0991

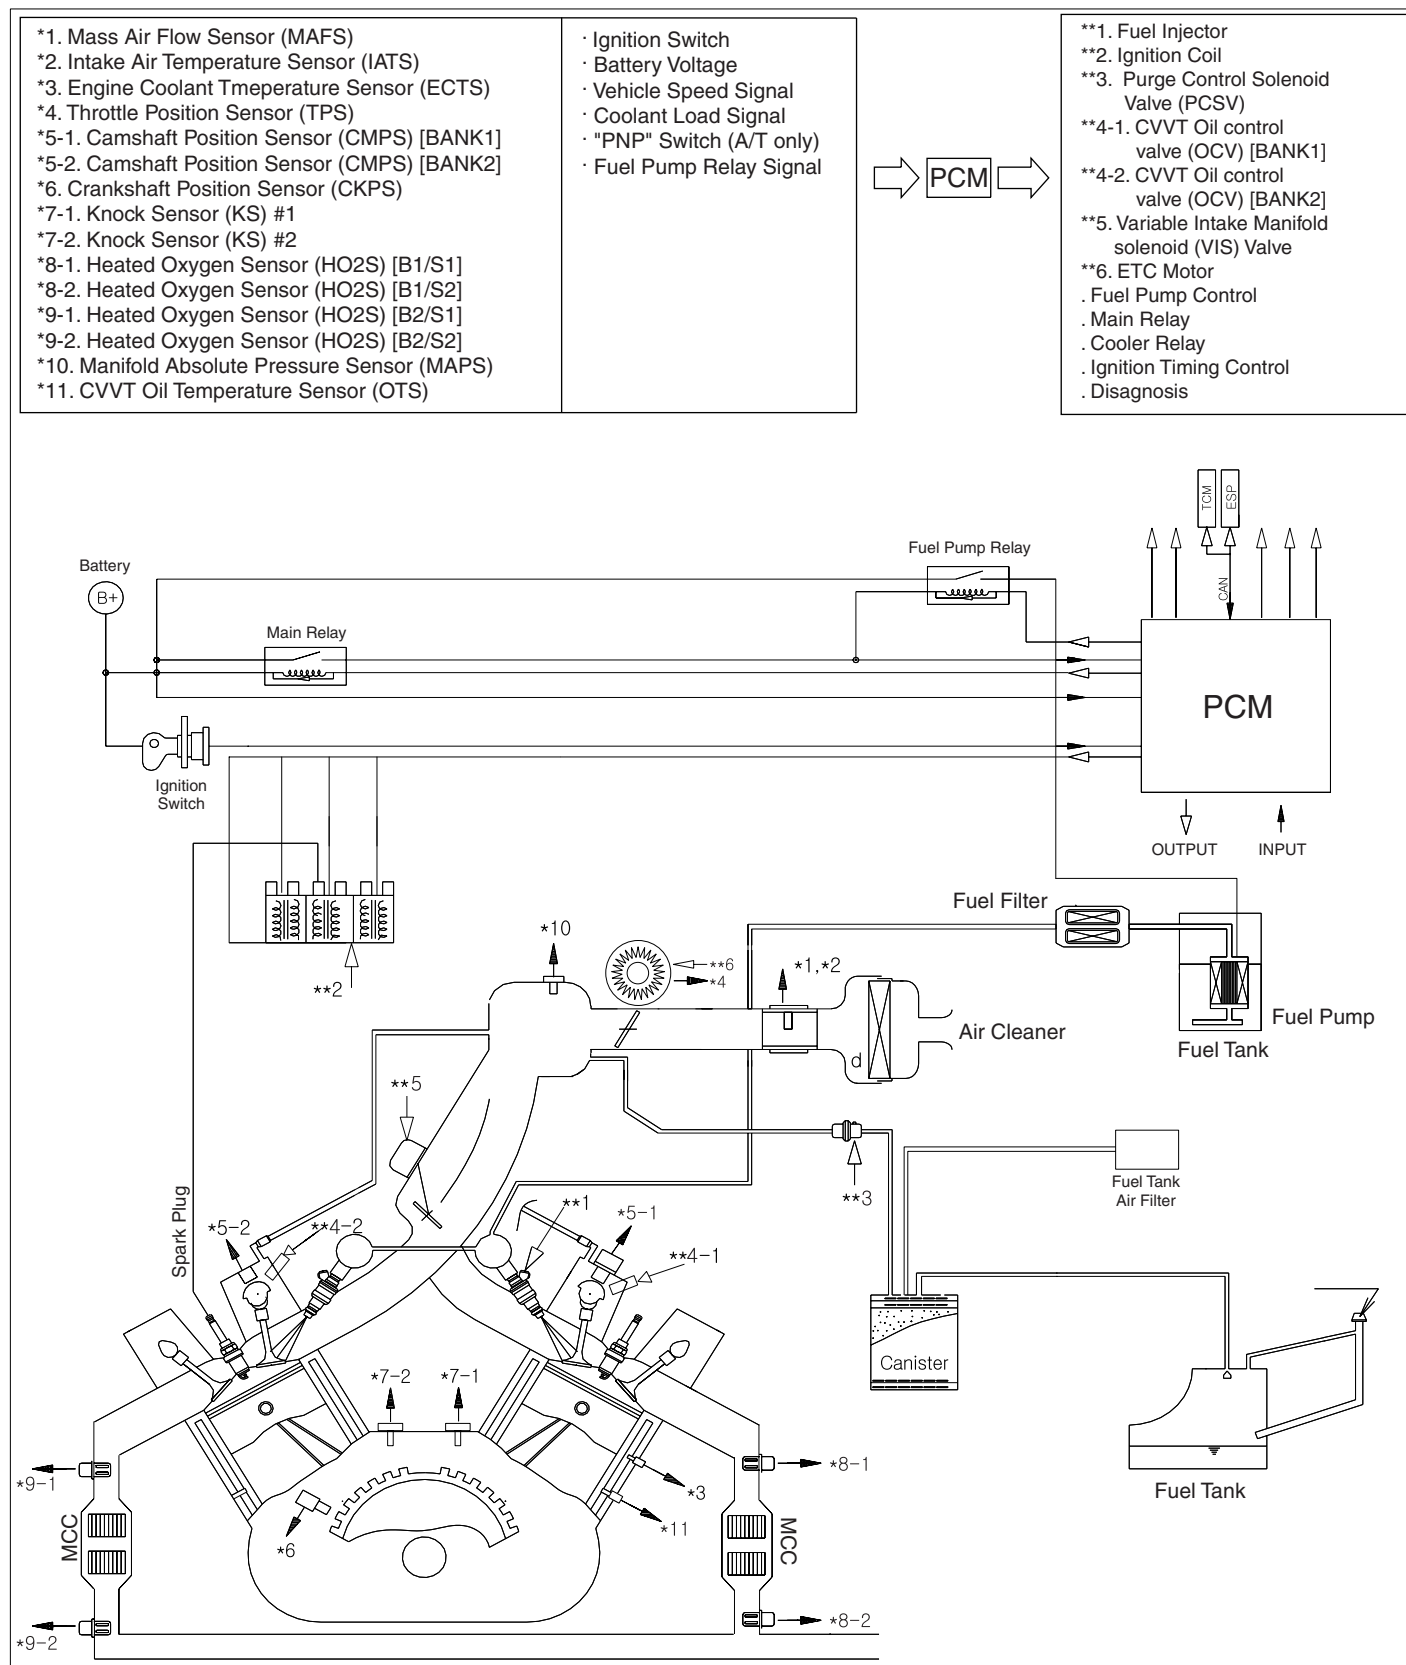

LEKG022A

CRANKCASE EMISSION CONTROL SYSTEM

COMPONENTS EB9AD119

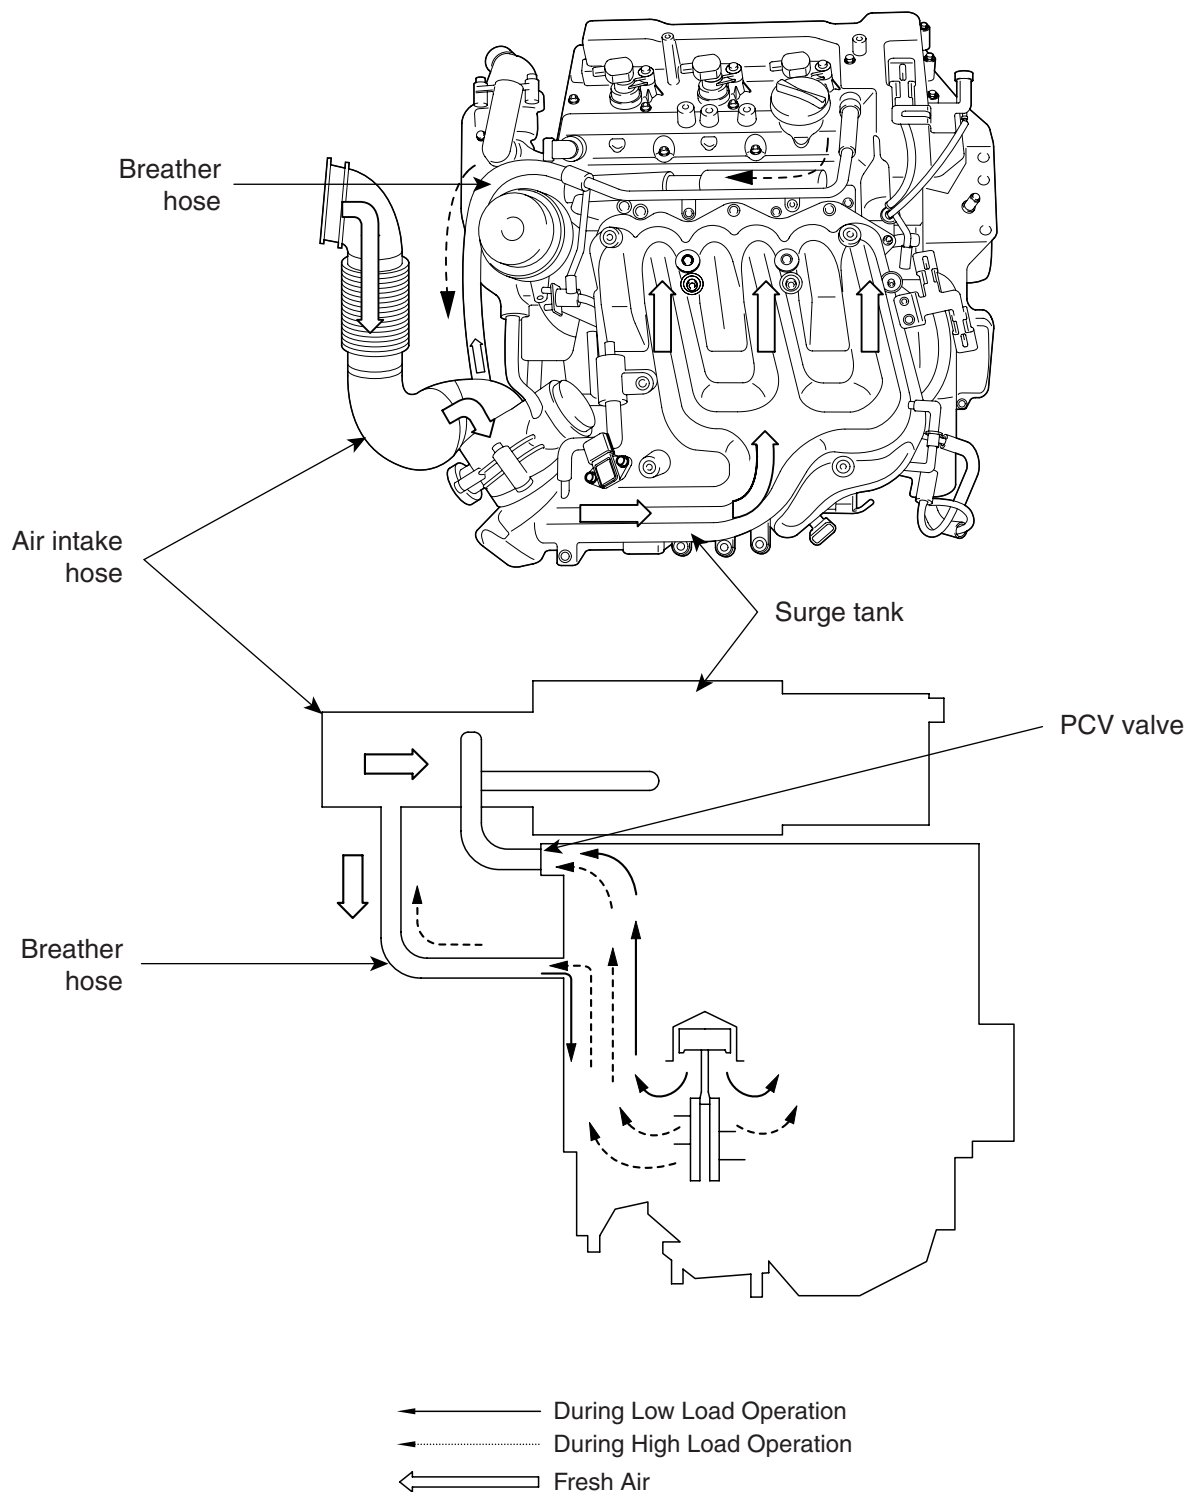

CRANKCASE EMISSION CONTROL SYSTEM

EC -7


INSPECTION EE3A08AE

1. Disconnect the ventilation hose from the positive crankcase ventilation (PCV) valve. Remove the PCV valve from the rocker cover and reconnect it to the ventilation hose.
2. Run the engine at idle and put a finger on the open end of the PCV valve and make sure that intake manifold vacuum can be felt.



NOTE

The plunger inside the PCV valve will move back and forth.




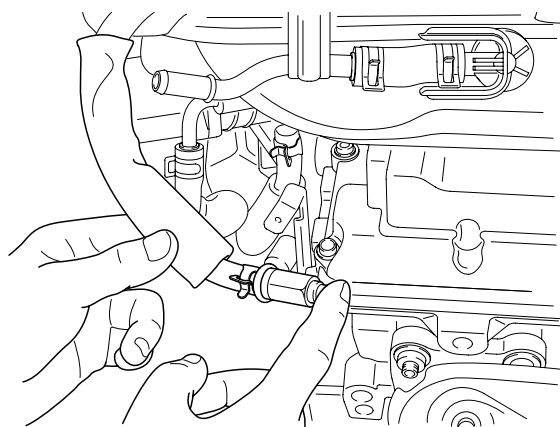


EERF600H

POSITIVE CRANKCASE VENTILATION (PCV) VALVE

OPERATION

EF235F30

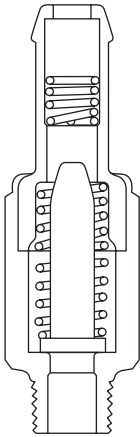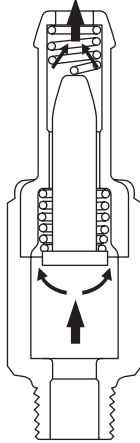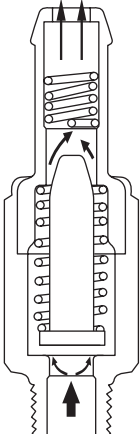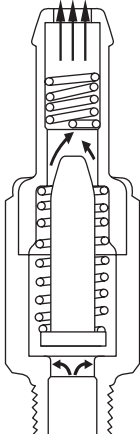
Intake manifold side (No vacuum)  Rocker cover side BEGE001S		Intake manifold side (High vacuum)  Rocker cover side BEGE001T	
Engine condition	Not running	Engine condition	Idling or decelerating
PCV valve	Not operating	PCV valve	Fully operating
Vacuum passage	Restricted	Vacuum passage	Small
Intake manifold side (Moderate vacuum)  Rocker cover side BEGE001U		Intake manifold side (Low vacuum)  Rocker cover side BEGE001V	
Engine condition	Normal operation	Engine condition	Accelerating and high load
PCV valve	Properly operating	PCV valve	Slightly operating
Vacuum passage	Large	Vacuum passage	Very large

CRANKCASE EMISSION CONTROL SYSTEM

EC -9

REMOVAL E33EA7D4

1. Remove the valve pad (A) and disconnect the vacuum hose (B).

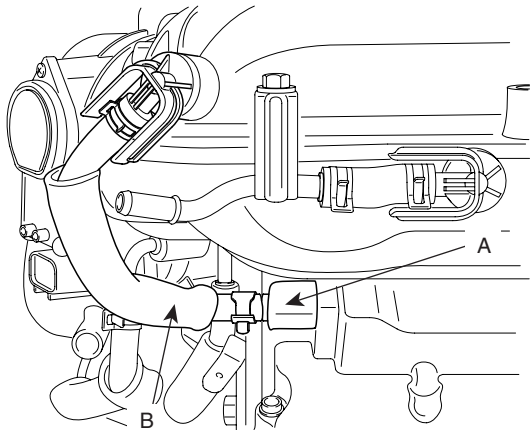


EERF600I

2. Remove the PCV Valve.

INSPECTION E1C28FC8

1. Remove the PCV valve.
2. Insert a thin stick(A) into the PCV valve(B) from the threaded side to check that the plunger moves.
3. If the plunger does not move, the PCV valve is clogged. Clean it or replace.

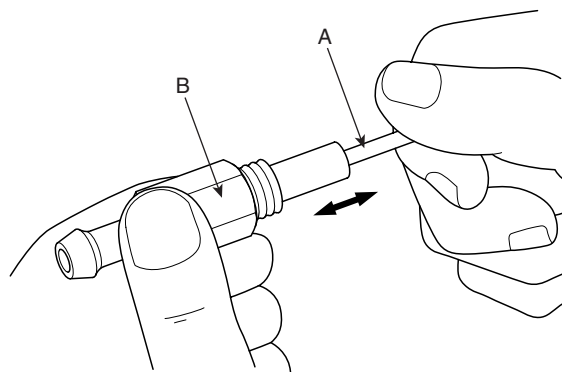

EERF600J

INSTALLATION E1CEC5F7

Install the PCV valve and tighten to the specified torque.


PCV Valve installation : 7.8 ~ 11.8 N·m (0.8 ~ 1.2 kgf·m, 5.8 ~ 8.7lbf·ft)

EVAPORATIVE EMISSION CONTROL SYSTEM

DESCRIPTION E424D99E

Evaporative Emission Control System prevents fuel vapor stored in fuel tank from vaporizing into the atmosphere. When the fuel evaporates in the fuel tank, the vapor

passes through vent hoses or tubes to the canister filled with charcoal and the canister temporarily holds the vapor in the charcoal. If ECM determines to draw the gathered vapor into the combustion chambers during certain operating conditions, it will use vacuum in intake manifold to move it.

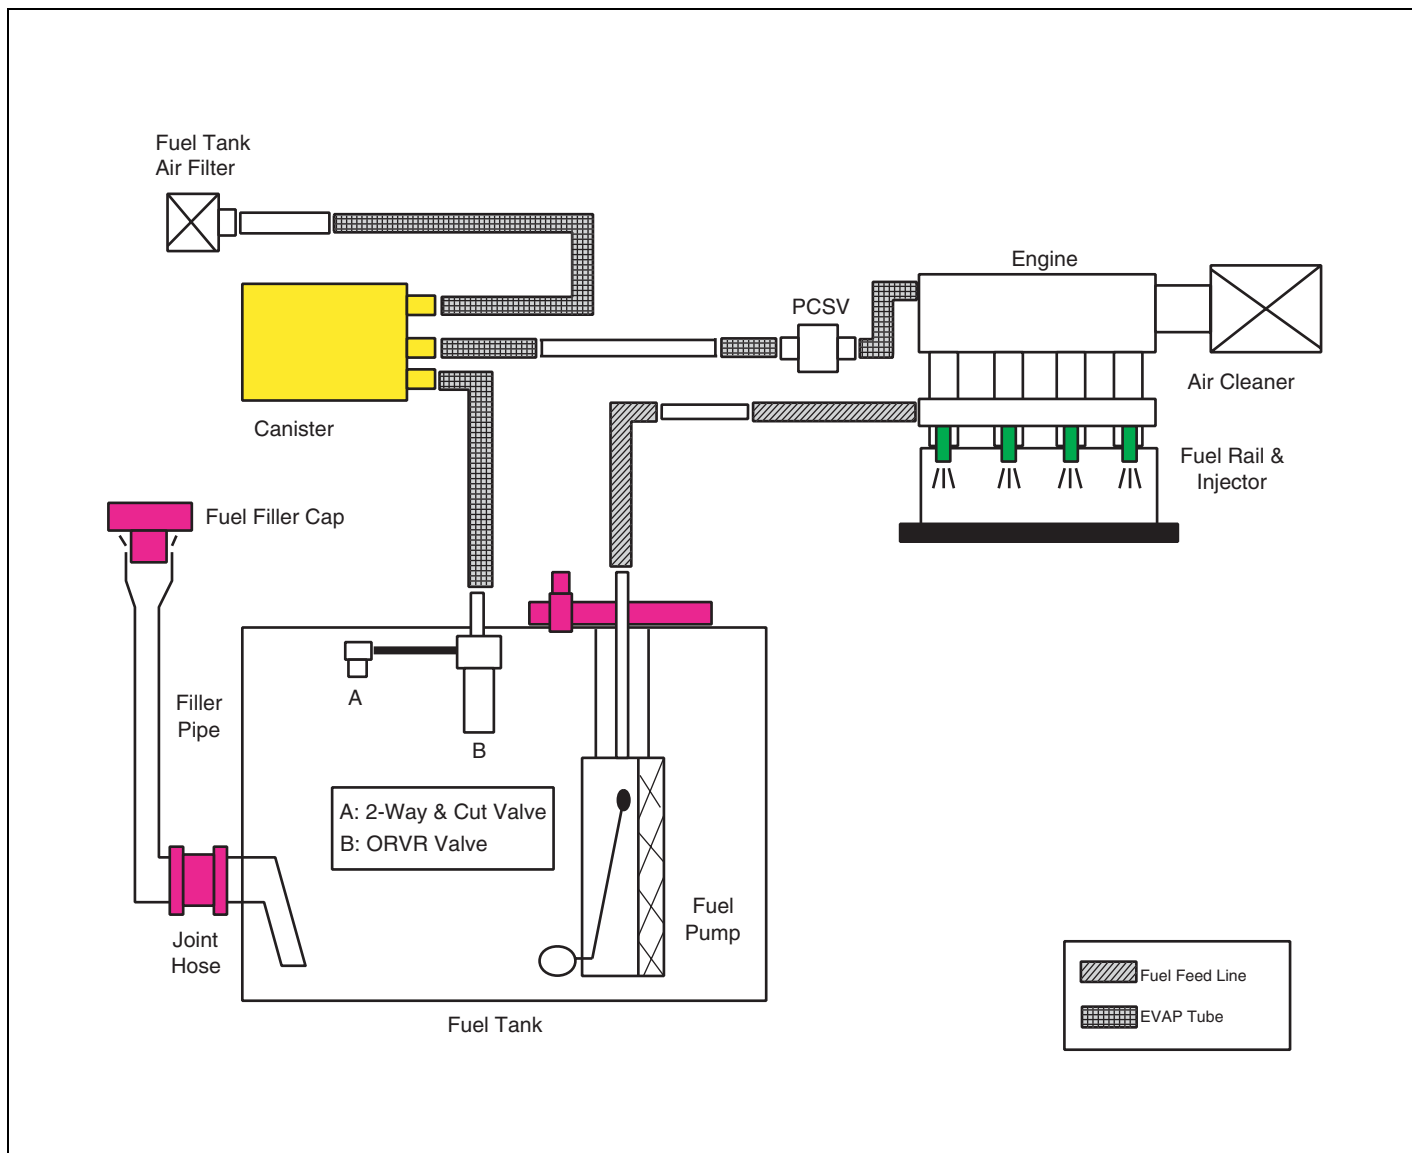

LEKG033A

CANISTER

Canister is filled with charcoal and absorbs evaporated vapor in fuel tank. The gathered fuel vapor in canister is drawn into the intake manifold by the ECM/PCM when appropriate conditions are set.

PURGE CONTROL SOLENOID VALVE (PCSV)

Purge Control Solenoid Valve (PCSV) is installed in the passage connecting canister and intake manifold. It is a duty type solenoid valve and is operated by ECM/PCM signal. To draw the absorbed vapor into the intake manifold, the ECM/PCM will open the PCSV, otherwise the passage remains closed.

FUEL FILLER CAP

A ratchet tightening device on the threaded fuel filler cap reduces the chances of incorrect installation, which would seal the fuel filler. After the gasket on the fuel filler cap and the fill neck flange contact each other, the ratchet produces a loud clicking noise indicating the seal has been set.

INSPECTION

ED7A7B84

1. Disconnect the vacuum hose from the throttle body, and connect a vacuum pump to the vacuum hose.
2. Check the following points when the engine is cold [engine coolant temperature 60°C(140°F) or below] and when it is warm [engine coolant temperature 80°C(176°F) or higher].

WHEN ENGINE IS COLD

Engine operating condition	Applied vacuum	Result
Idling	50 kPa (7.3 psi)	Vacuum is held
3,000 rpm		


WHEN ENGINE IS WARM

Engine operating condition	Applied vacuum	Result
Idling	50 kPa (7.3 psi)	Vacuum is held
Within 3 minutes after engine start at 3,000 rpm	Try to apply vacuum	Vacuum is released
After 3 minutes have passed after engine start at 3,000 rpm	50 kPa (7.3 psi)	Vacuum will be held momentarily, after which, it will be released

CANISTER


REMOVAL EE6CF861

1. Disconnect the vacuum hoses (A,B).

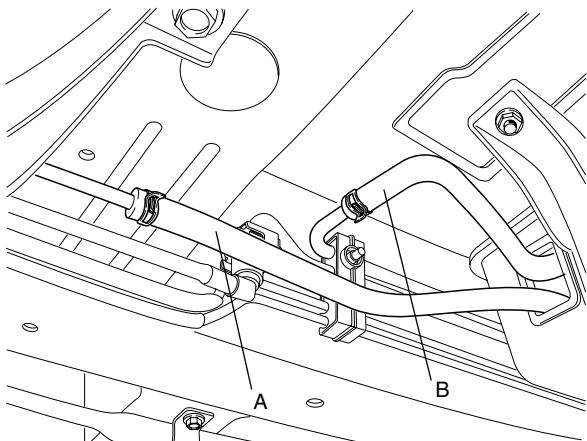


LEKG001B

2. Remove the canister assembly (A) with unscrewing the two mounting bolts (B).

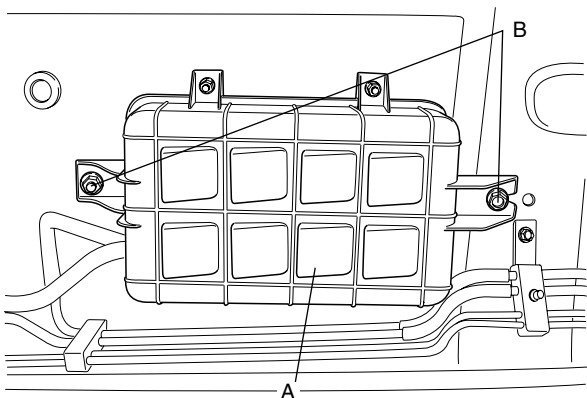


LEKG001C

3. Open the canister upper cover (A) with unfastening the four bolts (B) and remove the canister (C) from the canister lower cover (D).

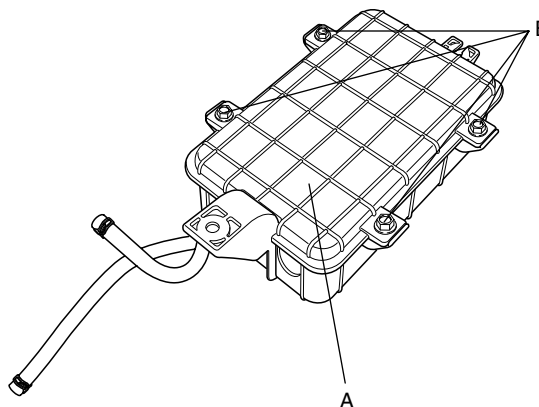

LEKG001D

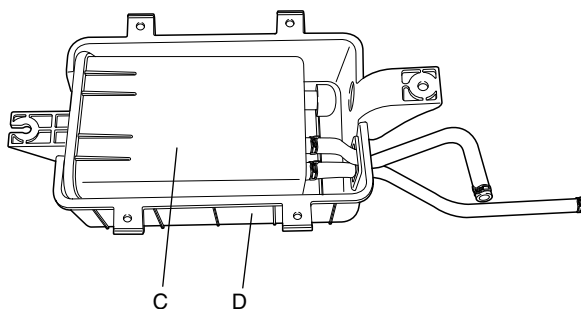

LEKG001E


INSPECTION EDB2F74D

1. Look for loose connections, sharp bends or damage to the fuel vapor lines.
2. Look for distortion, cracks or fuel damage.

EVAPORATIVE EMISSION CONTROL SYSTEM

EC -13

3. After removing the canister, inspect for cracks, damage or saturated canister.

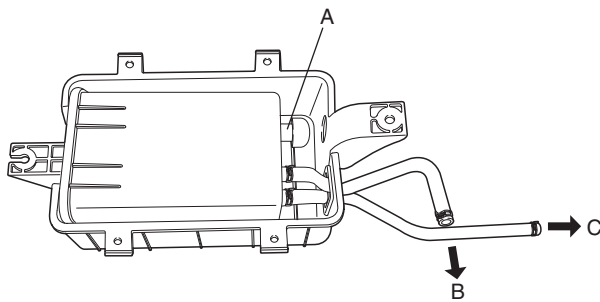

A : To Air
B : To Intake Manifold
C : To Fuel Tank

LEKG044A

INSTALLATION EAE35D9B

Install the canister according to the reverse order of "RE-MOVAL" procedure.

PURGE CONTROL SOLENOID VALVE (PCSV)

INSPECTION E7DDBEBC



NOTE

When disconnecting the vacuum hose, make an identification mark on it so that it can be reconnected to its original position.

1. Disconnect the vacuum hose from the solenoid valve.
2. Detach the harness connector.
3. Connect a vacuum pump to the nipple which is connected to intake manifold.
4. Apply vacuum and check when voltage is applied to the PCSV and when the voltage is discontinued.

Battery voltage	Normal condition
When applied	Vacuum is released
When discontinued	Vacuum is maintained

5. Measure the resistance between the terminals of the solenoid valve.


PCSV coil resistance(Ω) :
19.0 ~ 22.0 Ω at 20°C (68°F)

FUEL FILLER CAP

DESCRIPTION EC1C48B2

A ratchet tightening device on the threaded fuel filler cap reduces the chances of incorrect installation, which would

seal the fuel filler. After the gasket on the fuel filler cap and the filler neck flange contact each other, the ratchet produces a loud clicking noise indicating the seal has been set.

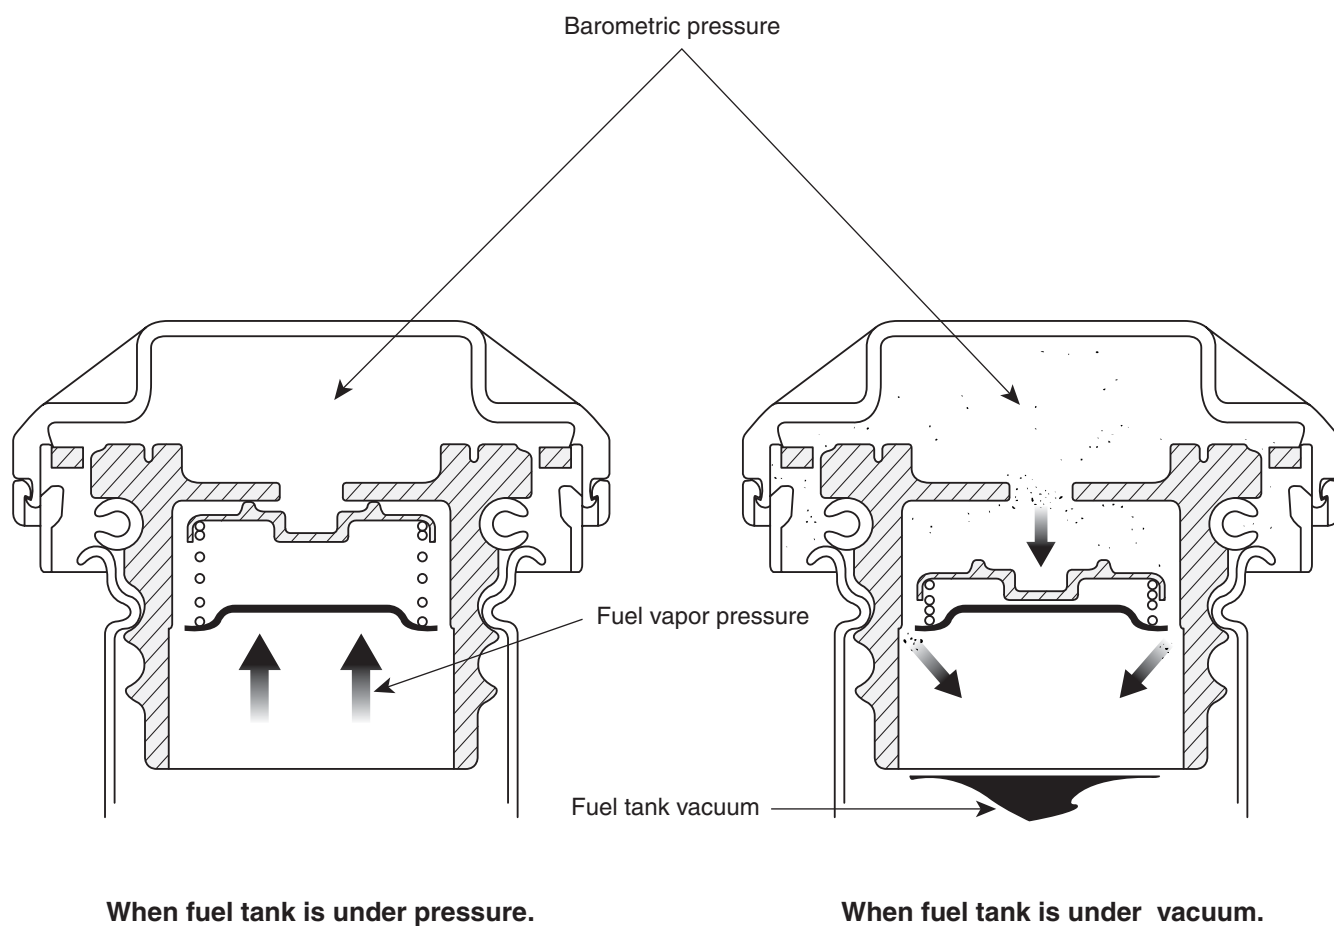

LEGE015A

EXHAUST EMISSION CONTROL SYSTEM

DESCRIPTION E8AED0DE

Exhaust emissions (CO, HC, NOx) are controlled by a combination of engine modifications and the addition of special control components.

Modifications to the combustion chamber, intake manifold, camshaft and ignition system form the basic control system.

These items have been integrated into a highly effective system which controls exhaust emissions while maintaining good driveability and fuel economy.

AIR/FUEL MIXTURE CONTROL SYSTEM [MULTIPOINT FUEL INJECTION (MFI) SYSTEM]

The MFI system is a system which uses the signals from the heated oxygen sensor to activate and control the injector installed in the manifold for each cylinder, thus precisely regulating the air/fuel mixture ratio and reducing emissions.


This in turn allows the engine to produce exhaust gases of the proper composition to permit the use of a three way catalyst. The three way catalyst is designed to convert the three pollutants (1) hydrocarbons (HC), (2) carbon monoxide (CO), and (3) oxides of nitrogen (NOx) into harmless substances. There are two operating modes in the MFI system.

1. Open Loop air/fuel ratio is controlled by information programmed into the ECM.
2. Closed Loop air/fuel ratio is adjusted by the ECM based on information supplied by the oxygen sensor.

CONTINUOUS VARIABLE VALVE TIMING (CVVT)

DESCRIPTION

E6D0A603

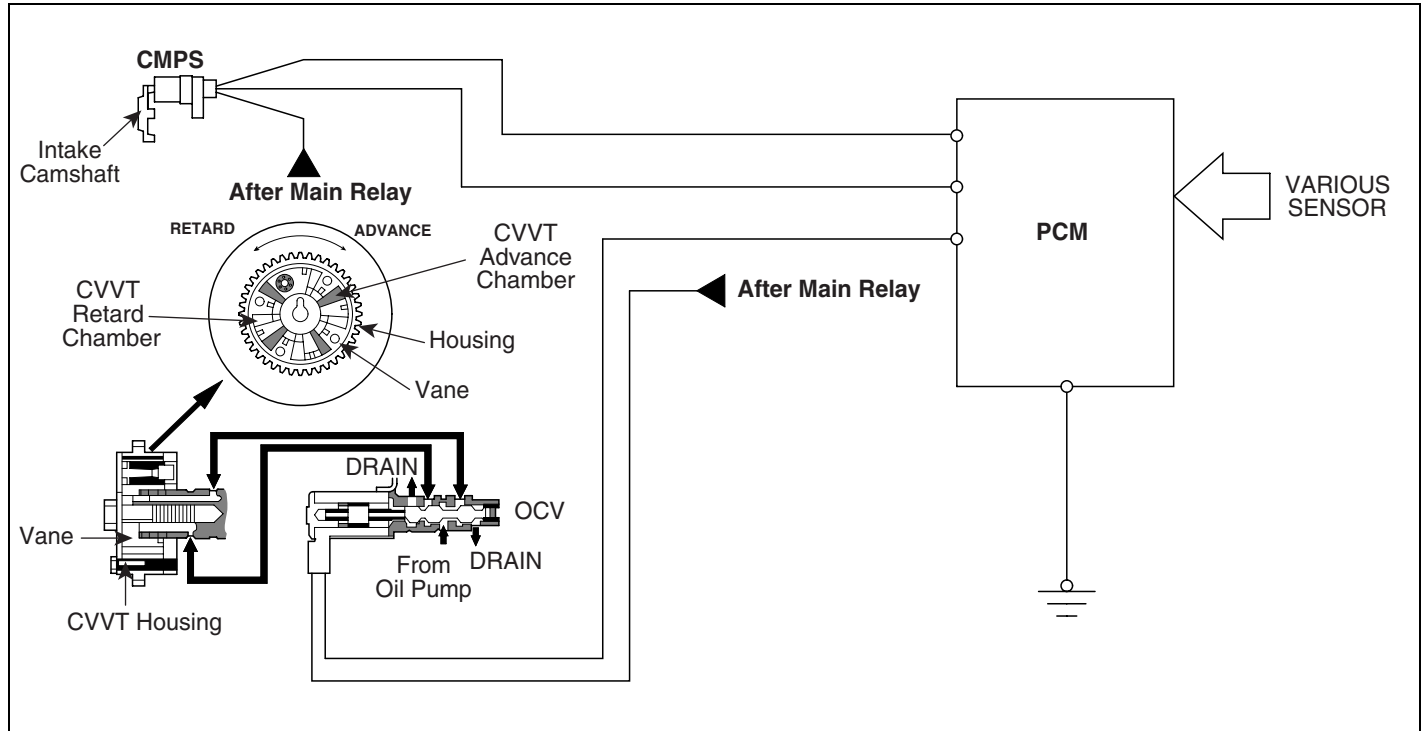

UEBG013A

The CVVT (Continuously Variable Valve Timing) which is installed on the exhaust camshaft controls intake valve open and close timing in order to improve engine performance.


The intake valve timing is optimized by CVVT system depending on engine rpm.

This CVVT system improves fuel efficiency and reduces NOx emissions at all levels of engine speed, vehicle

speed, and engine load by EGR effect because of valve over-lap optimization.

The CVVT changes the phase of the intake camshaft via oil pressure.

It changes the intake valve timing continuously.

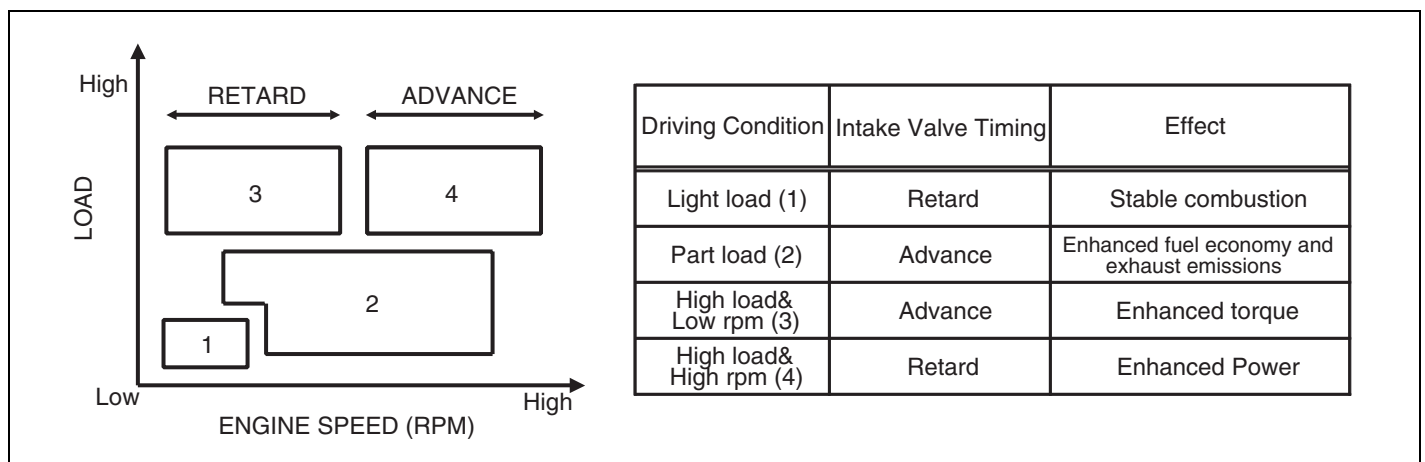

LEIF001Q

OPERATION

E74CC936

The CVVT system makes continuous intake valve timing changes based on operating conditions.




Intake valve timing is optimized to allow the engine to produce maximum power.

Cam angle is advanced to obtain the EGR effect and reduce pumping loss. The intake valve is closed quickly to

reduce the entry of the air/fuel mixture into the intake port and improve the changing effect.

Reduces the cam advance at idle, stabilizes combustion, and reduces engine speed.

If a malfunction occurs, the CVVT system control is disabled and the valve timing is fixed at the fully retarded position.

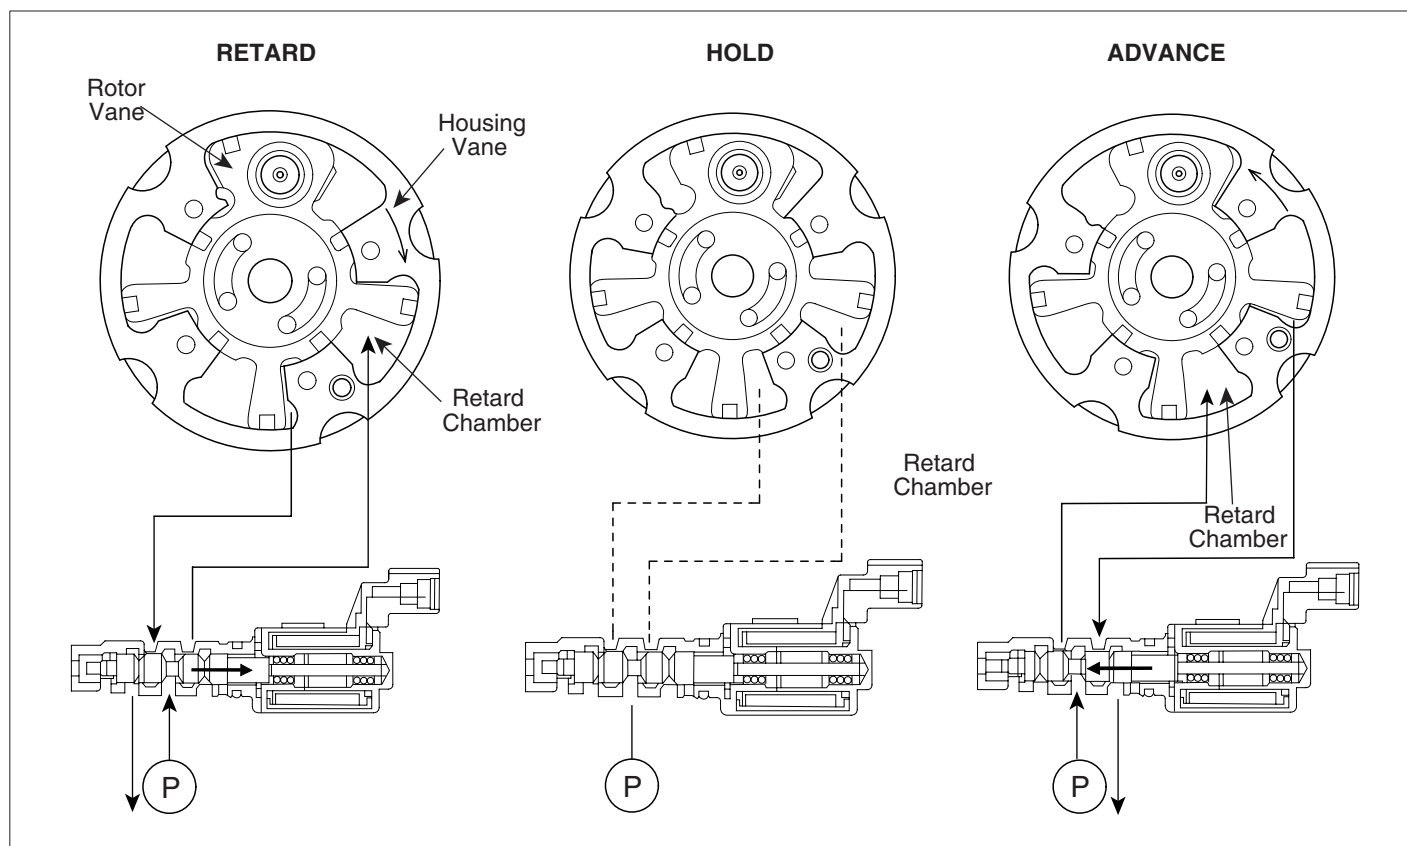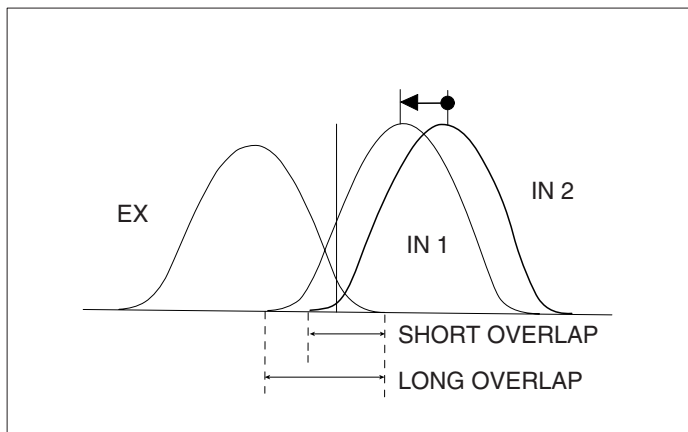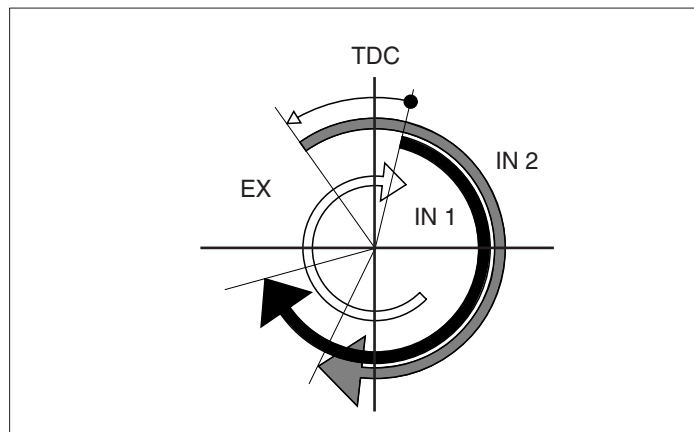

UEBG014A

1. The above figure shows the relative operation structures of the housing vane to the rotor vane.
2. If the CVVT is held a certain control angle, to hold this state, oil is replenished as much as oil leaks from the oil pump.

The OCV (Oil-flow Control Valve) spool location at this time is as follows.

Oil pump → Advance oil chamber (Little by little open the inflow side to the advance oil chamber) → Almost close the drain side

Be sure there might be a difference in the position according to the engine running state (rpm, oil temperature, and oil pressure).